


Data for Models 2530-3A-16 and 2530-3B-16 Three-Station Branched Combiners

Performance specifications

Type:	Resonant Cavity	
Size:	16"	
No. of Cavities per Station:	3	
Typical VSUR	at ± 100 kHz:	1.05:1
	at ± 150 kHz:	1.05:1
	at ± 200 kHz:	1.10:1
Typical Insertion loss:	-0.33 dB	
Typical Frequency Response (deviation from center frequency)	at ± 100 kHz:	-0.04 dB
	at ± 150 kHz:	-0.08 dB
	at ± 200 kHz:	-0.10 dB
Typical Group Delay (deviation from center frequency)	at ± 100 kHz:	25 nsec
	at ± 150 kHz:	50 nsec
	at ± 200 kHz:	200 nsec
Typical Bandwidth:	± 200 kHz	
Spur Rejection, 800 kHz or greater:	Greater than 80 dB	



Dimensions:

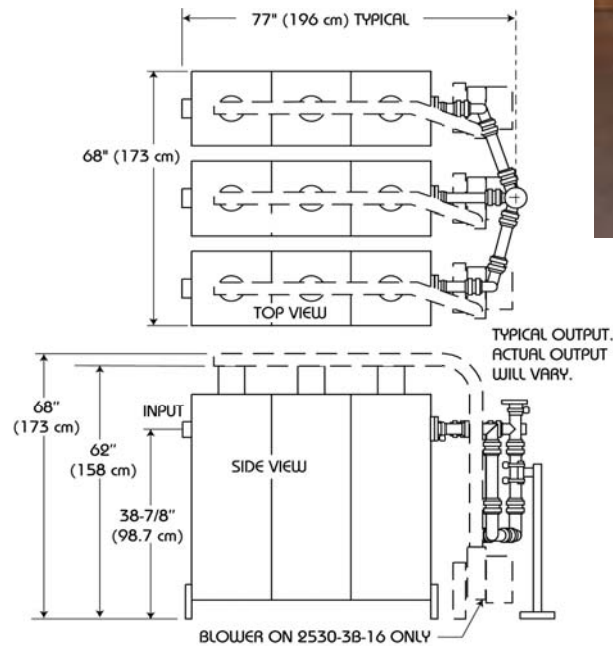

Inputs, outputs, and weight:

	Model 2530-3A-16	Model 2530-3B-16
Maximum Input Power:	10 kW	20 kW
Cooling:	Convection	Forced Air
Inputs:	1-5/8" EIA	3-1/8" EIA
Outputs:	3-1/8" EIA	6-1/8" EIA

Document No. ds-2530-3-16 (150317)

A Division of Howell Laboratories, Inc., P. O. Box 389, Bridgton, Maine 04009 USA
 (207) 647-3327 1-888-SHIVELY Fax: (207)647-8273
 An Employee-Owned Company

www.shively.com
 sales@shively.com
 Certified to ISO-9001