

## Typical Data for Models 2606-3A and 2606-3B Bandpass Filters

### Performance specifications


Type:	Interdigital	
Size:	6"	
No. of poles:	3	
Typical VSWR	at $F_0$ :	< 1.05:1
	at $\pm 200$ kHz:	< 1.10:1
Typical insertion loss:	< 0.40 dB	
Typical frequency response (deviation from center frequency)	at $\pm 100$ kHz:	-0.04 dB
	at $\pm 150$ kHz:	-0.08 dB
	at $\pm 200$ kHz:	-0.10 dB
Typical group delay (deviation from center frequency)	at $\pm 100$ kHz:	20 nsec
	at $\pm 150$ kHz:	50 nsec
	at $\pm 200$ kHz:	100 nsec
Typical bandwidth:	$\pm 200$ kHz	



### Inputs, outputs, and weight:

	Model 2606-3A	Model 2606-3B
Maximum input power:	5 kW	8 kW
Cooling:	Convection	Forced Air
Inputs:	1-5/8" EIA	1-5/8" EIA
Outputs:	1-5/8" EIA	1-5/8" EIA
Shipping weight:	175 lb (80 kg)	180 lb (82 kg)

### Dimensions:

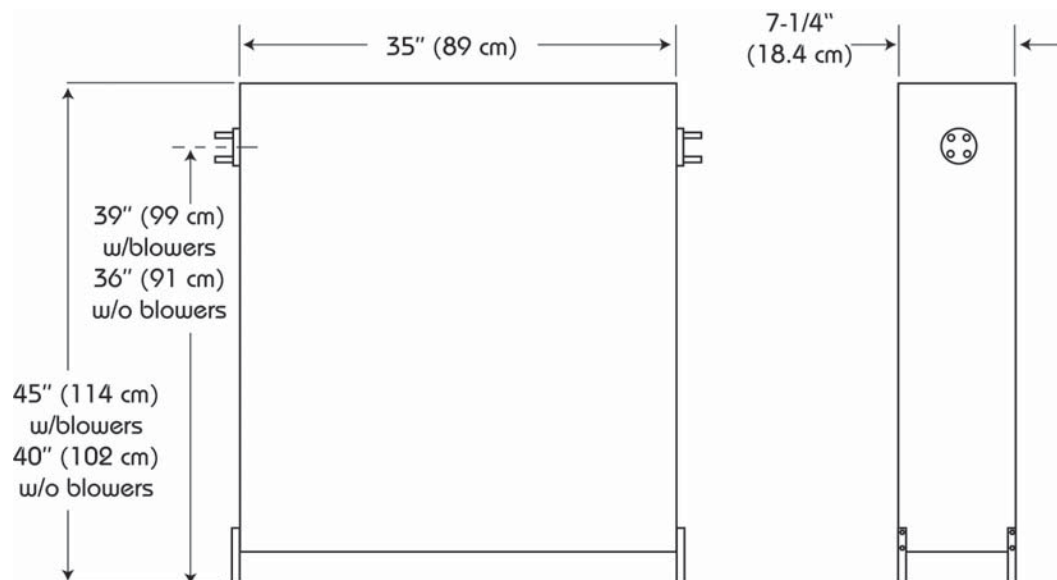

Document No. ds-2606-3 (150317)

A Division of Howell Laboratories, Inc., P. O. Box 389, Bridgton, Maine 04009 USA  
 (207) 647-3327 1-888-SHIVELY Fax: (207)647-8273  
 An Employee-Owned Company

www.shively.com  
 sales@shively.com  
 Certified to ISO-9001