


## Attenuation vs. Frequency for Copper Transmission Line

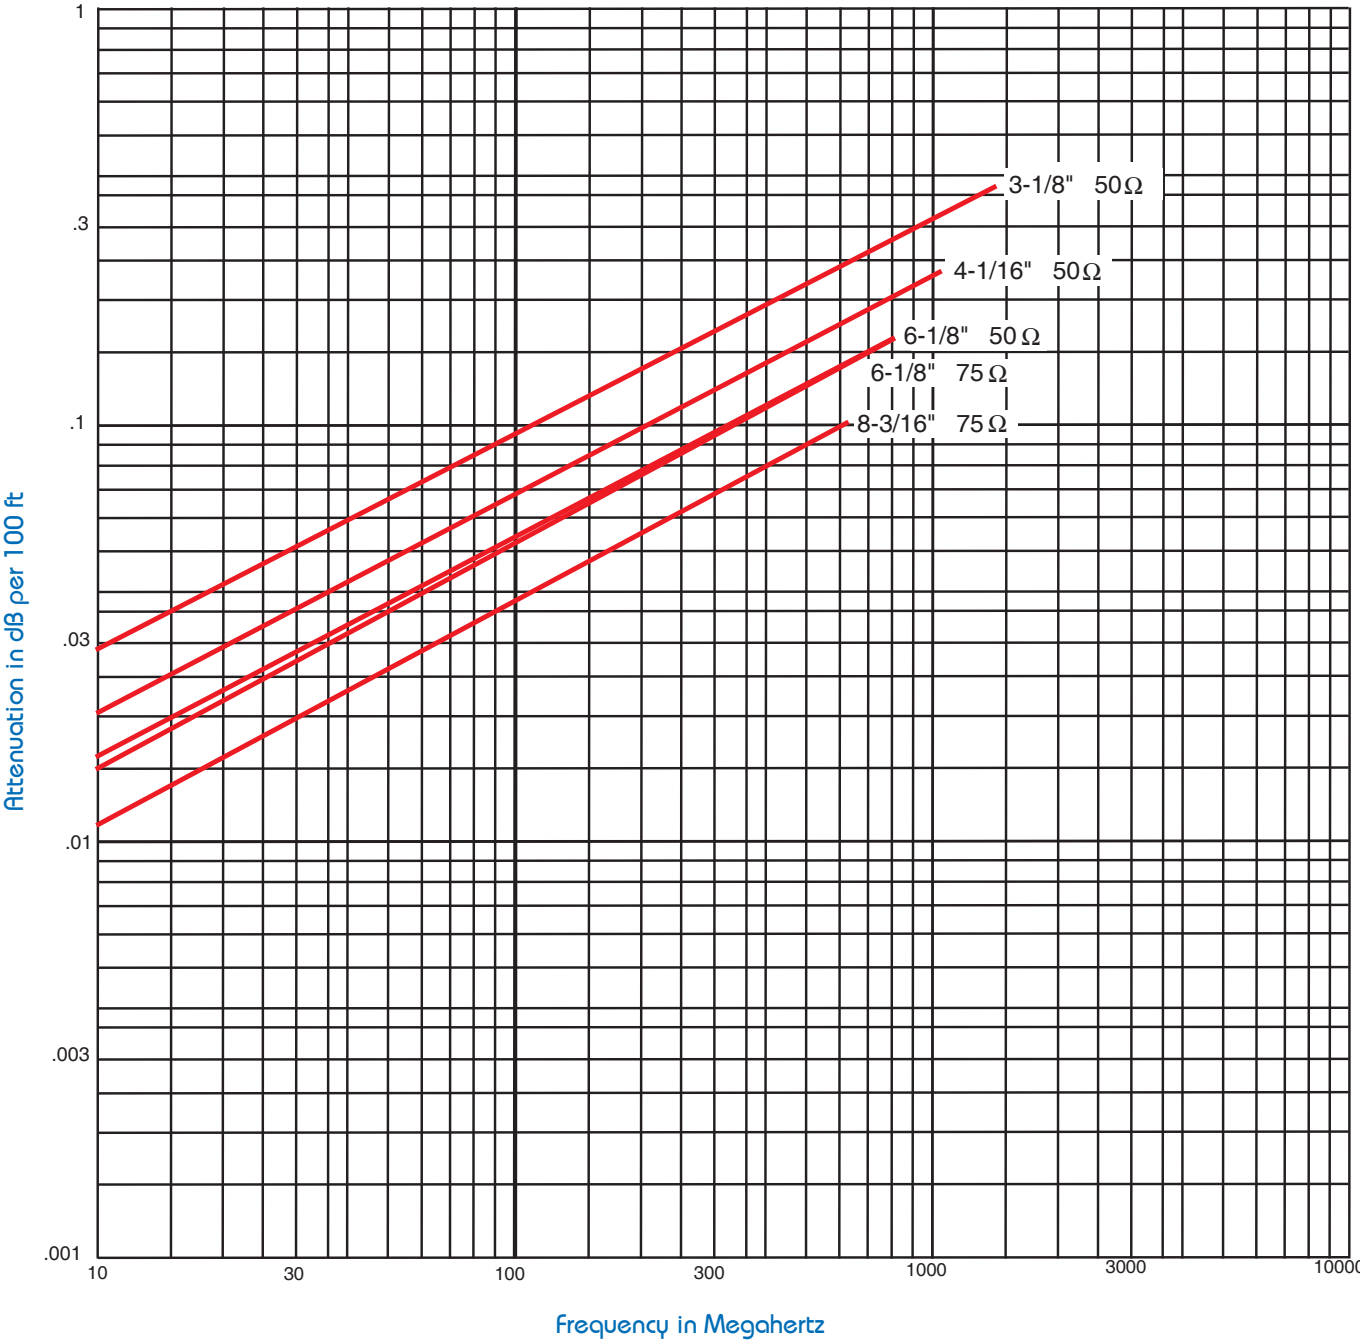

Note: Attenuation is based on 20° C (68° F) ambient.

Document No. [tb-atten\\_vs\\_freq \(150319\)](#)