


SHIVELY LABS SAMPLE PATTERN

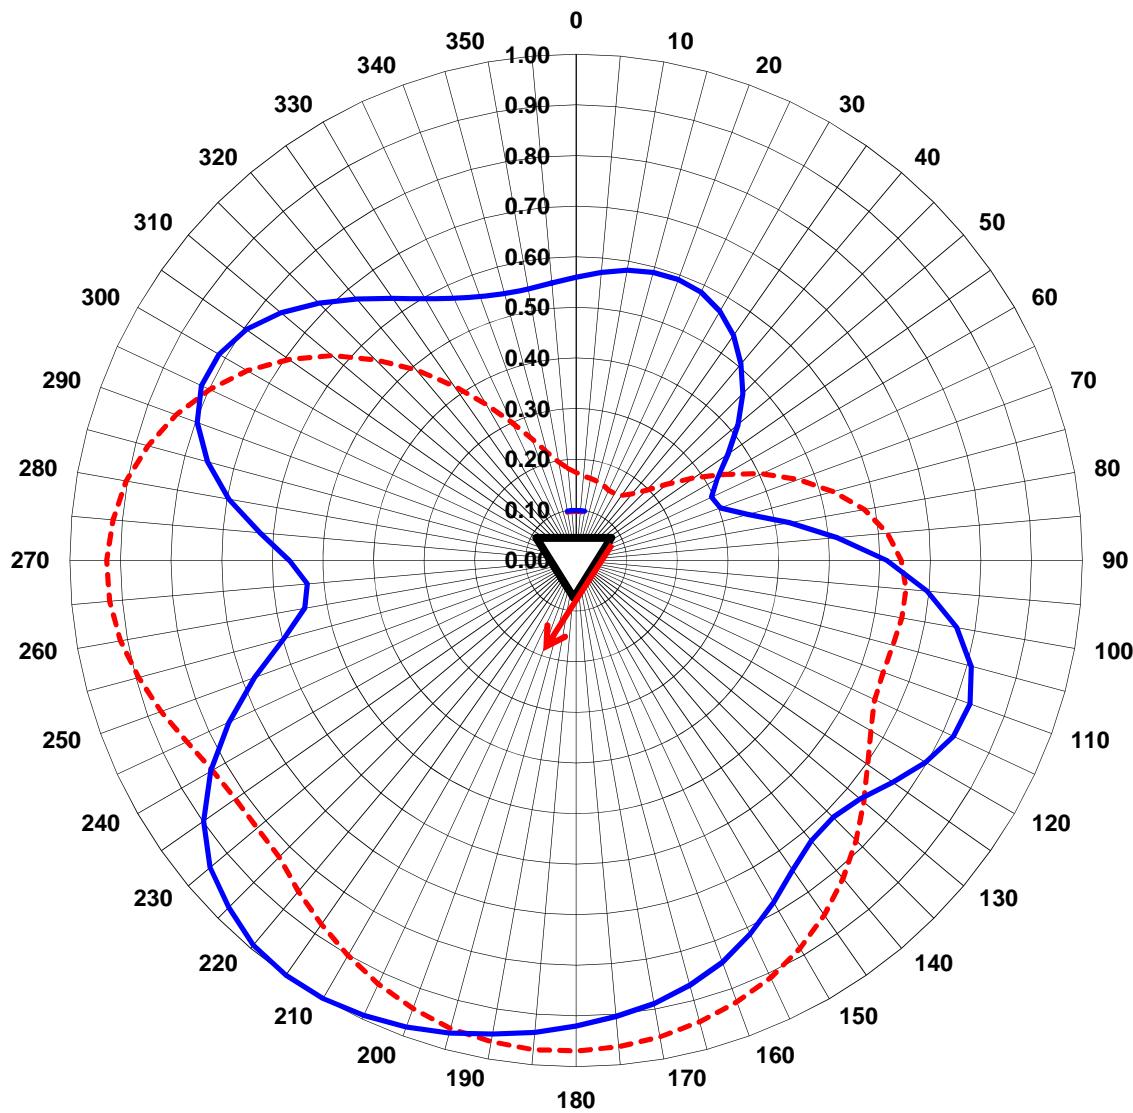

6810 ANTENNA

VERTICAL RMS: **69.56%**


HORIZONTAL RMS: **72.10%**

PATTERN NUMBER
FREQUENCY:
ANTENNA AZIMUTH
TOWER
MOUNT STYLE
DISTANCE FROM TOWER

6810-018
HIGH BAND
210-DEGREES
PI-ROD 36-IN
PICKUP 2-LEG
STD. MOUNT XL

Antennas are supplied with standard mounts
Standard mounts fit 1.25" to 3.50" OD tower legs
or up to a 48-inch face tower
Mounts stand off 22.375-inches
Radomes and Deicers are optional
Pattern studies are optional
Shively Labs recommends anti-rotation brackets
for tower legs under 2-inches

SHIVELY LABS SAMPLE PATTERN

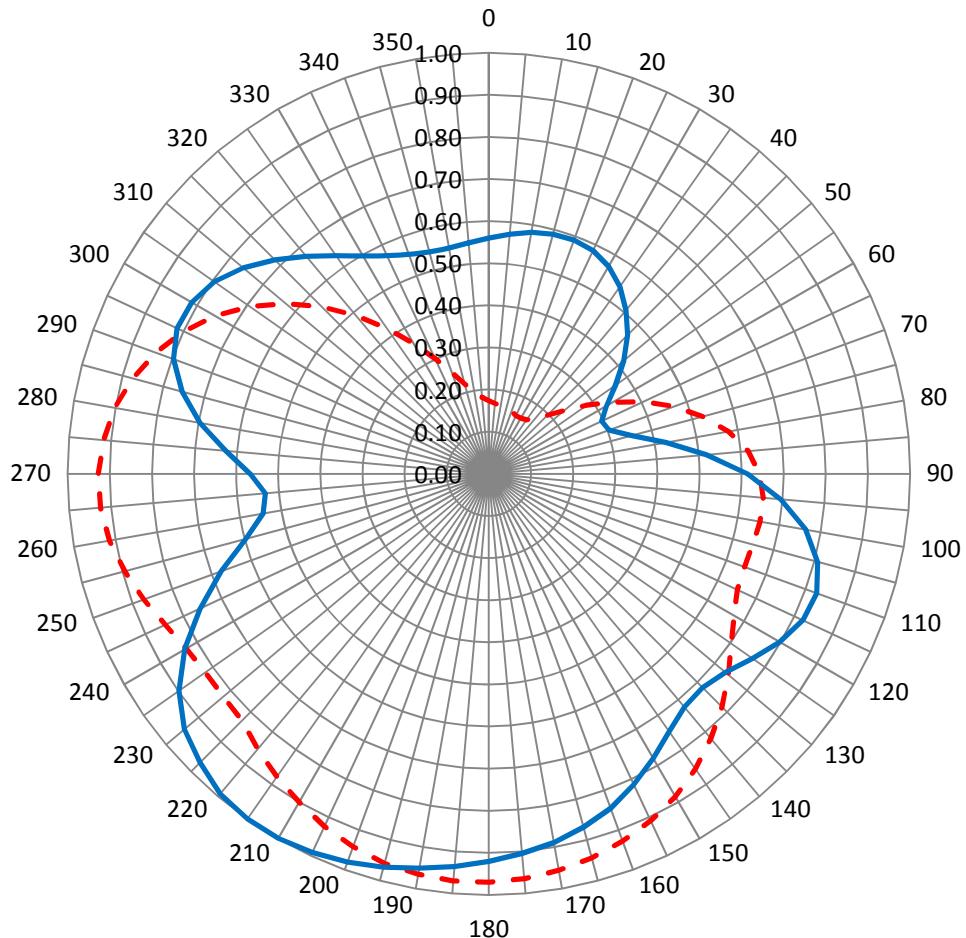

PATTERN NUMBER 6810-018

V-RMS 9.70%
H-RMS 9.87%

DEGREE	VERT	HORZ									
0	0.17	0.56	90	0.64	0.61	180	0.97	0.92	270	0.93	0.57
5	0.17	0.57	95	0.65	0.70	185	0.97	0.94	275	0.92	0.63
10	0.16	0.58	100	0.65	0.76	190	0.97	0.95	280	0.90	0.70
15	0.16	0.59	105	0.65	0.81	195	0.96	0.97	285	0.88	0.75
20	0.16	0.59	110	0.65	0.83	200	0.94	0.98	290	0.84	0.80
25	0.15	0.58	115	0.65	0.82	205	0.92	0.99	295	0.80	0.82
30	0.15	0.57	120	0.67	0.80	210	0.90	1.00	300	0.75	0.81
35	0.16	0.54	125	0.70	0.76	215	0.88	1.00	305	0.69	0.80
40	0.17	0.51	130	0.74	0.73	220	0.85	0.99	310	0.63	0.76
45	0.20	0.47	135	0.78	0.72	225	0.83	0.97	315	0.56	0.72
50	0.23	0.42	140	0.82	0.72	230	0.82	0.94	320	0.49	0.67
55	0.28	0.37	145	0.86	0.75	235	0.82	0.90	325	0.42	0.63
60	0.34	0.32	150	0.89	0.78	240	0.83	0.83	330	0.36	0.60
65	0.41	0.30	155	0.91	0.81	245	0.85	0.76	335	0.30	0.57
70	0.47	0.30	160	0.93	0.85	250	0.87	0.68	340	0.26	0.55
75	0.53	0.35	165	0.94	0.87	255	0.89	0.60	345	0.22	0.55
80	0.58	0.43	170	0.96	0.89	260	0.91	0.54	350	0.20	0.54
85	0.62	0.52	175	0.96	0.90	265	0.93	0.53	355	0.18	0.55